

Technical Sheet

Test Items	Standart	Unit	Result
Thickness	ISO 24346-EN428	mm	2mm
Weight	ISO 23997-EN430	g/m ²	2850g/m ²
Width	ISO 24341-EN426	m	2m
Length	ISO 24341-EN426	m	20m
Classification	ISO10874-EN685	class	34-43
Fire resistance	EN13501-1	class	Bfl-S1
	GB8624		Bf1
Toxic testing	GB18586		good
Electrical resistance	EN1815	kv	<2
Slip resistance dry	EN13893		≥0.3
Slip resistance wet	DIN51130		R9
Abrasion group	EN660-2	Group	T
Type Binder content	EN ISO 10581	type	1
Castor chair resistance	EN425		suitable
Residual indentation	EN 433 ISO 24343-1	mm	0,03
Colour fastness	ISO 105-B02	degree	≥6
Thermal conductivity	EN 12667	w/m.k	0,01m ²
Dimensional stability	ISO 23999-EN434	% mm	0,03
Chemical products resistance	EN 423-ISO26987		good
Toxic testing	GB18586		suitable
Filexibility	ISO 24344 (EN 435)		Excellent
Anti-bacterial	ISO 22196		Anti bacterial rate I
Sound-Adsorbing	EN ISO 717/2		+4dB
Surface treatment			PUR
TVOC Emission	ISO 16000-6	ug /m3	<10after 28 days
Underfloor heating		°C	Suitable max. 27 °C
Certification		Floorscore	Floorscore



URAN PREMIUM

phthalate free
100%



HOMOGENEOUS
COMPACT VINYL


URAN PREMIUM
HOMOGENEOUS COMPACT VINYL



2.0 mm (T) X 2.0 m (W) x 20m(L)



☐ Uran 65801

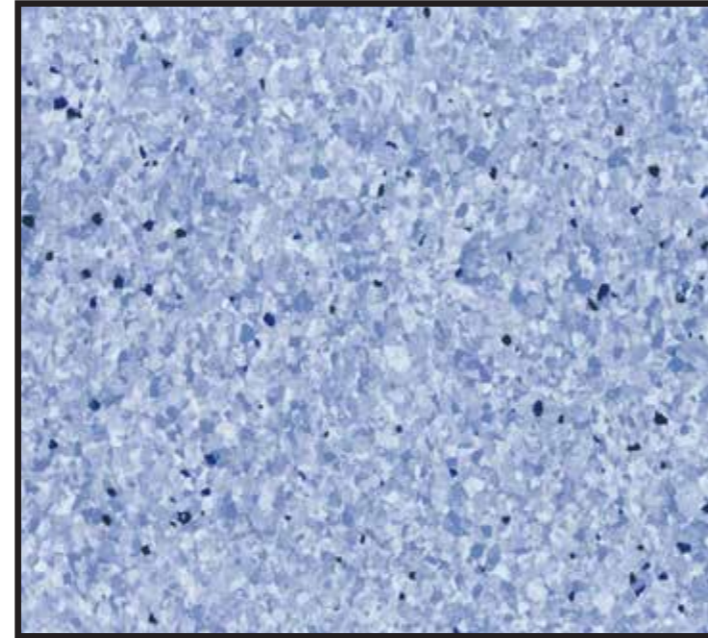


☐ Uran 65813




☐ Uran 65825



☐ Uran 65

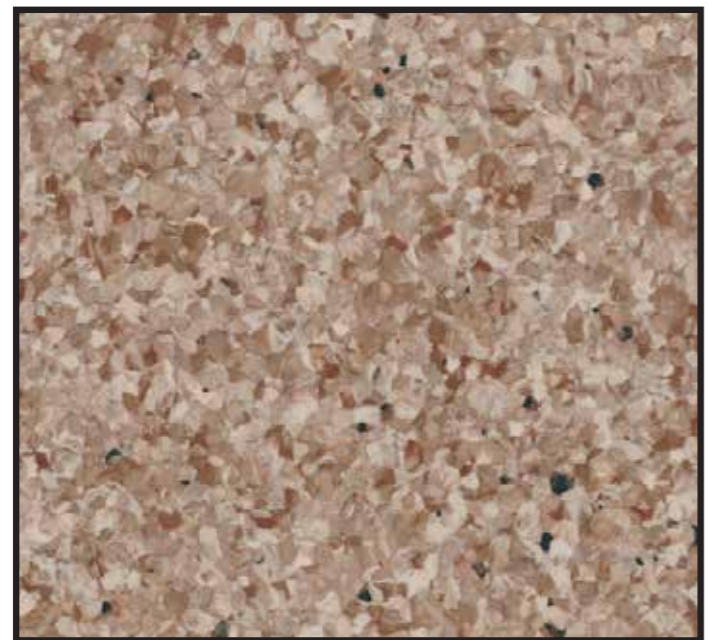

☐ Uran 65824

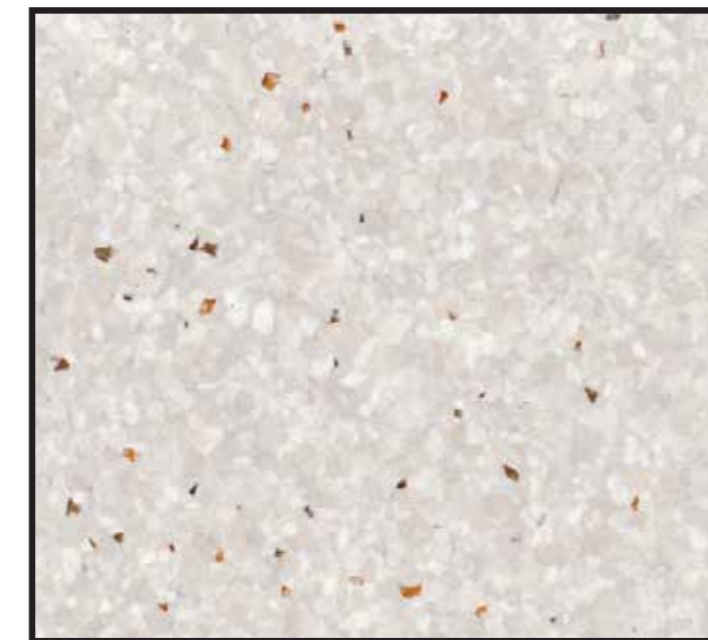


☐ Uran 65835



Structure

- Pur treatment
- Homogeneous flooring

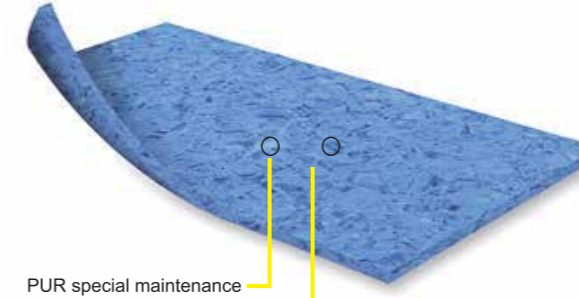

PUR special maintenance treatment
Compacted homogeneous flooring

- High performing flexible homogeneous multipurpose flooring
- NO directional design, The decorative effect is more flexible
- Densely compacted surface for improved mar-resistance and Anti pollution performance.
- Special maintenance treatment, ease of maintenance,
- Special formulation for improved anti - bacterial and anti - mildew.



Uran Premium Uygulama Alanları

- Sağlık ve Yaşlı Bakımı
- Ofis ve İşletme
- Eğitim
- Mağazacılık
- Konaklama